


DATE _____ PROJECT _____ FIRM _____ TYPE _____

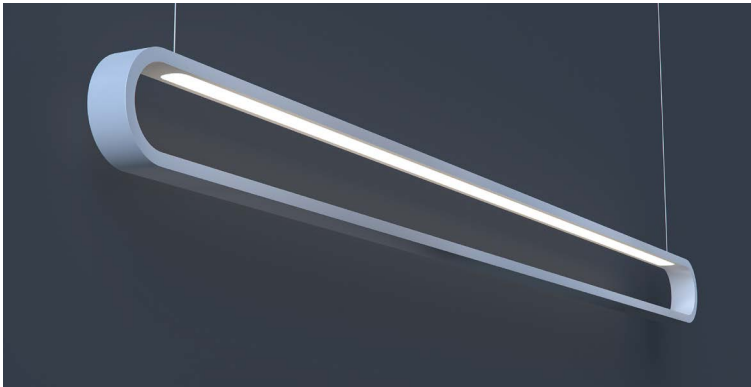

FEATURES

- Narrow, Oval-Shaped Luminaire with Inner Illumination
- Can be Suspended Vertically or Horizontally
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Fixture has an Extruded Aluminum Rolled and Welded Housing | **OPTICS** Laser Cut Acrylic Lens

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated



DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)

ELECTRICAL Remote Driver with 'Power Over Wire' System Which Eliminates Power Feed Cord By Combining The Aircraft Cable and Power Feed

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	6.75 W/ft	475 lm/ft
Low (LTG2)	4 W/ft	285 lm/ft
High (LTG3)	9.5 W/ft	660 lm/ft

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING

1 2 3 4 5 6 7 8 9 10 11

1 - FIXTURE ID OVALO	2 - LENGTH 2 - 2 ft 3 - 3 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER (REMOTE) DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility
--------------------------------	---	---	---	--	---

7 - FINISH W - White (Standard) BLK* - Black CC* - Custom Color (provide RAL number**)	8 - MOUNTING ACP-V - Air Craft Cable Vertical Mount (50") ACP-H - Air Craft Cable Horizontal Mount (50")	11 - CIRCUIT (REMOTE) EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit
--	---	---

*White cord and canopy provided. Must specify for other requests.
**(See [here](#) for finish options)

DATE


PROJECT

FIRM

TYPE

MOUNTING OPTIONS

ACP-V - Air Craft Cable Vertical Mount

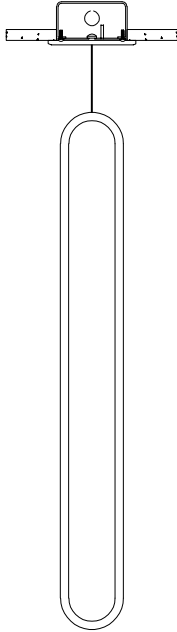

ACP-H - Air Craft Cable Horizontal Mount

